


\*Dimensions and illustrations are approximate and for reference only

Sequence® 750 Series - Model 3600SEQ12

Our best seller! The compact model 750 series delivers big flow for little power. Great for smaller and simple ponds (3,000 gallons or less).

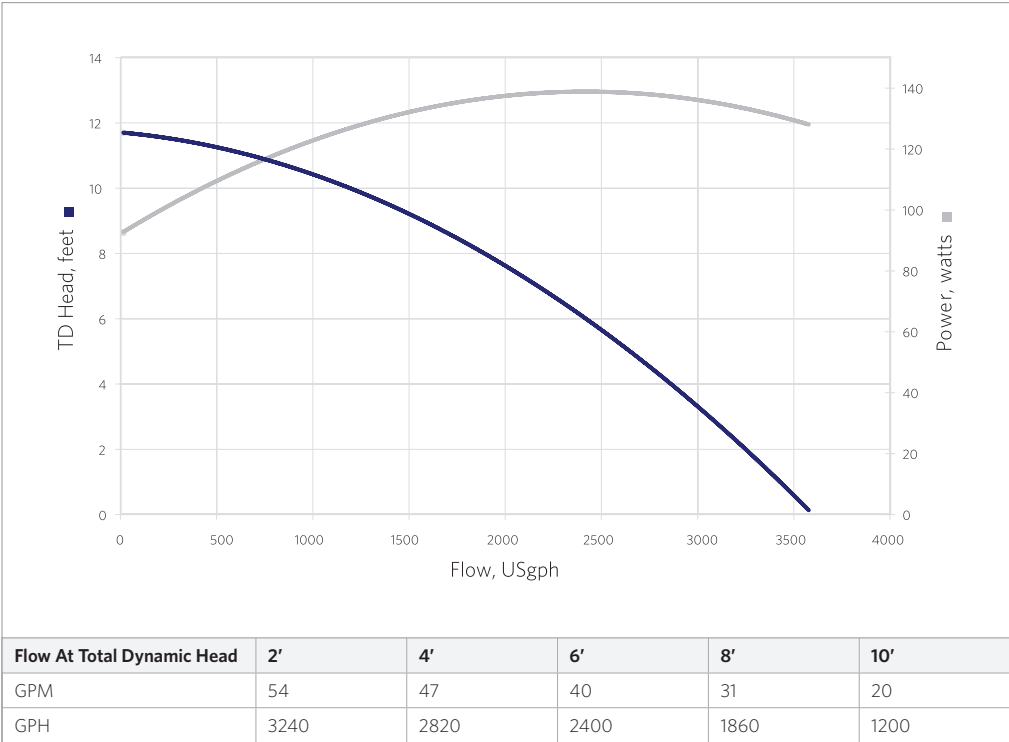

3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	3600SEQ12
INLET	2"
DISCHARGE	1.5"
MAX FLOW (gph)	3600
MAX HEAD (feet)	12'
MAX POWER (watts)	142
MAX CURRENT (amps)	1.25
@ (volts)	115
MOTOR HP	1/8
MOTOR ENCLOSURE	TEFC
IMPELLER	8




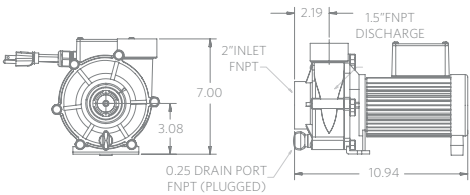

\*Dimensions and illustrations are approximate and for reference only

Sequence® 750 Series - Model 4200SEQ12

Our best seller! The compact model 750 series delivers big flow for little power. Great for smaller and simple ponds (3,000 gallons or less).

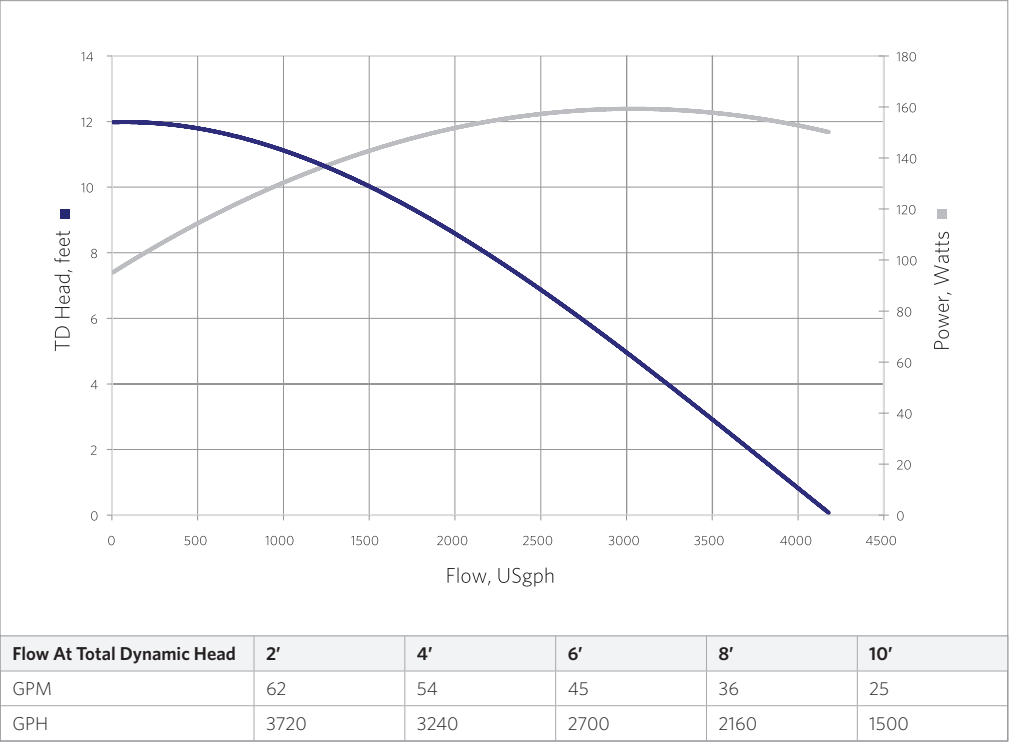

3 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

MODEL	4200SEQ12
INLET	2"
DISCHARGE	1.5"
MAX FLOW (gph)	4200
MAX HEAD (feet)	12'
MAX POWER (watts)	154
MAX CURRENT (amps)	1.39
@ (volts)	115
MOTOR HP	1/8
MOTOR ENCLOSURE	TEFC
IMPELLER	9






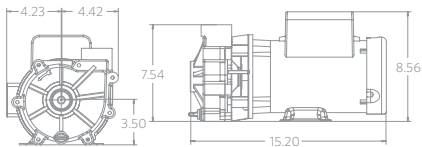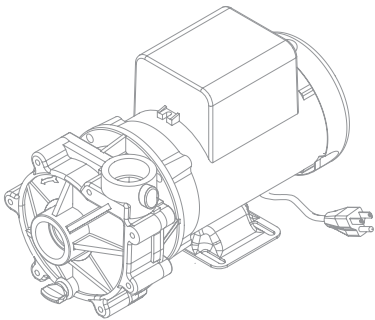

\*Dimensions and illustrations are approximate and for reference only

Sequence® 1000 Series - Model 3300SEQ21

The Classic! The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

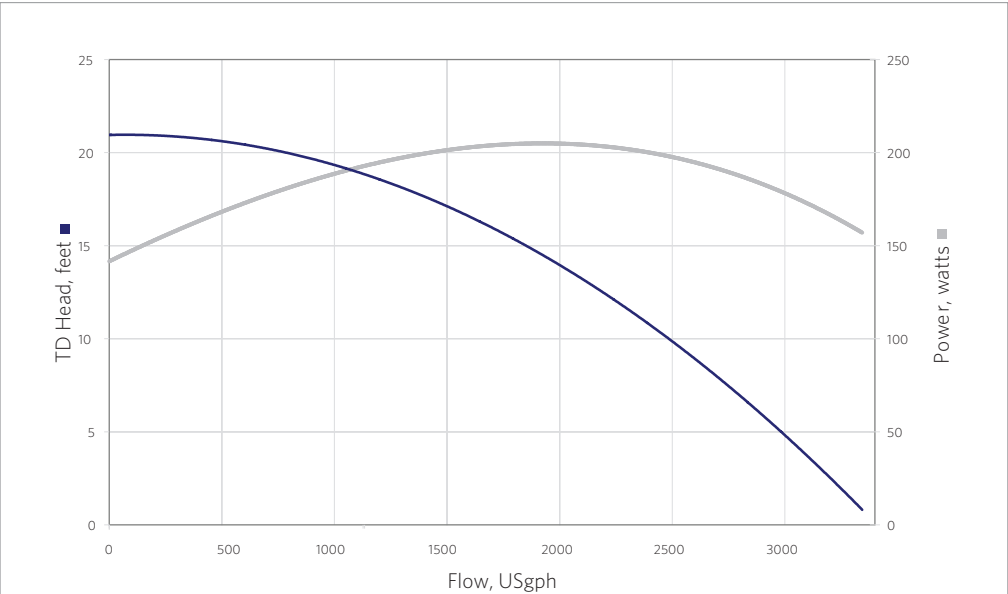

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	51	45	38	28	13
GPH	3060	2700	2280	1680	780



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR


MODEL	3300SEQ21
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	3300
MAX HEAD (feet)	21'
MAX POWER (watts)	206
MAX CURRENT (amps)	2.36
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	4

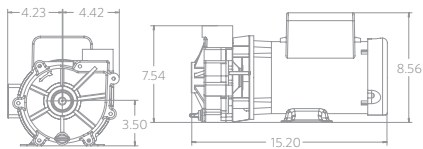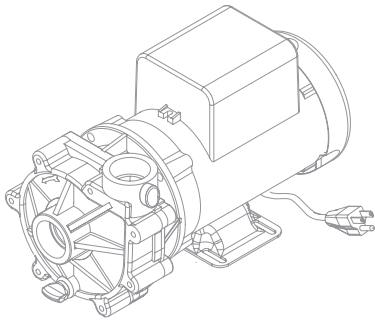

\*Dimensions and illustrations are approximate and for reference only

Sequence® 1000 Series - Model 4500SEQ21

The Classic! The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

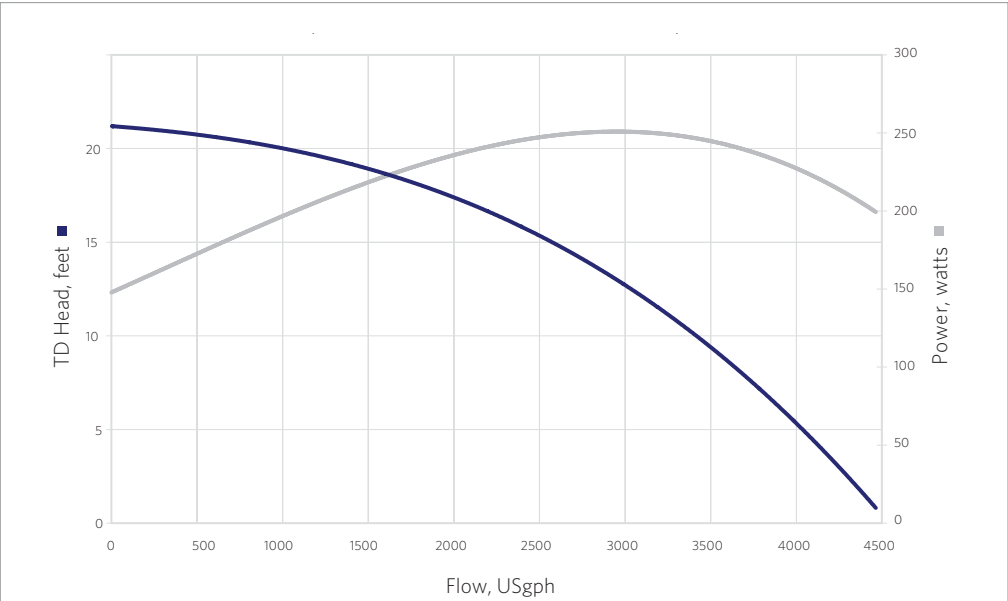

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	69	61	53	40	17
GPH	4140	3660	3180	2400	1020



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	4500SEQ21
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	4500
MAX HEAD (feet)	21'
MAX POWER (watts)	250
MAX CURRENT (amps)	2.69
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	5




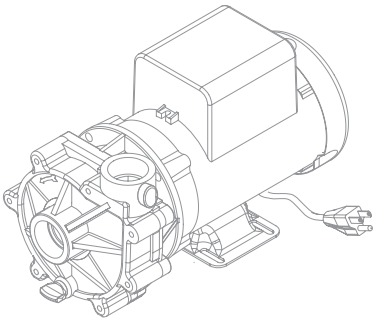

\*Dimensions and illustrations are approximate and for reference only

Sequence® 1000 Series - Model 5100SEQ22

The Classic! The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

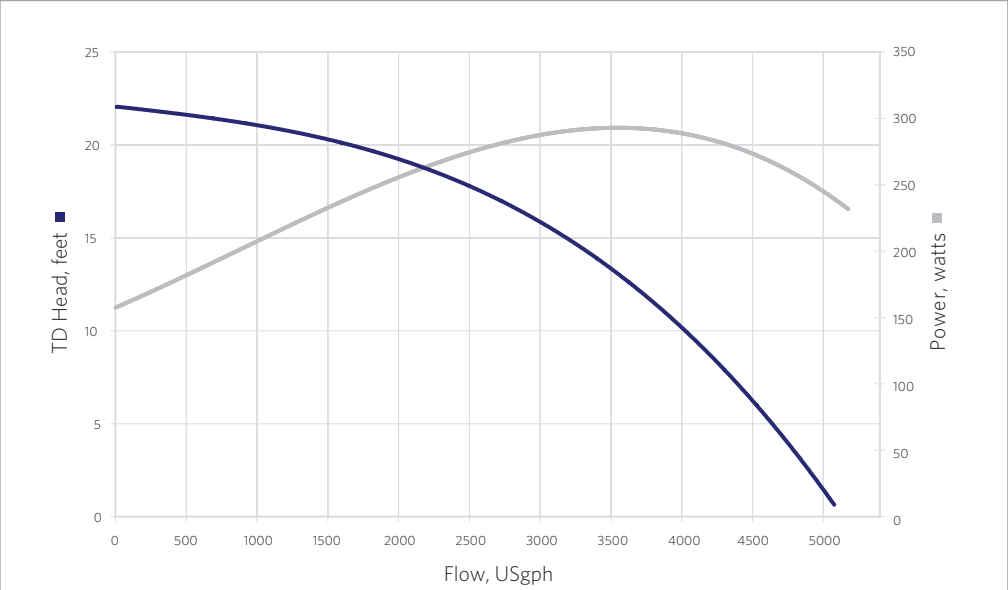

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	79	71	63	50	28
GPH	4740	4260	3780	3000	1680



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR


MODEL	5100SEQ22
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	5100
MAX HEAD (feet)	22'
MAX POWER (watts)	293
MAX CURRENT (amps)	3.03
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	6

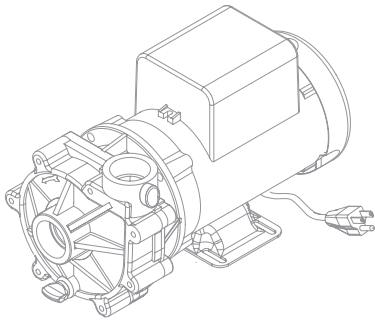

\*Dimensions and illustrations are approximate and for reference only

Sequence® 1000 Series - Model 6100SEQ23

The Classic! The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

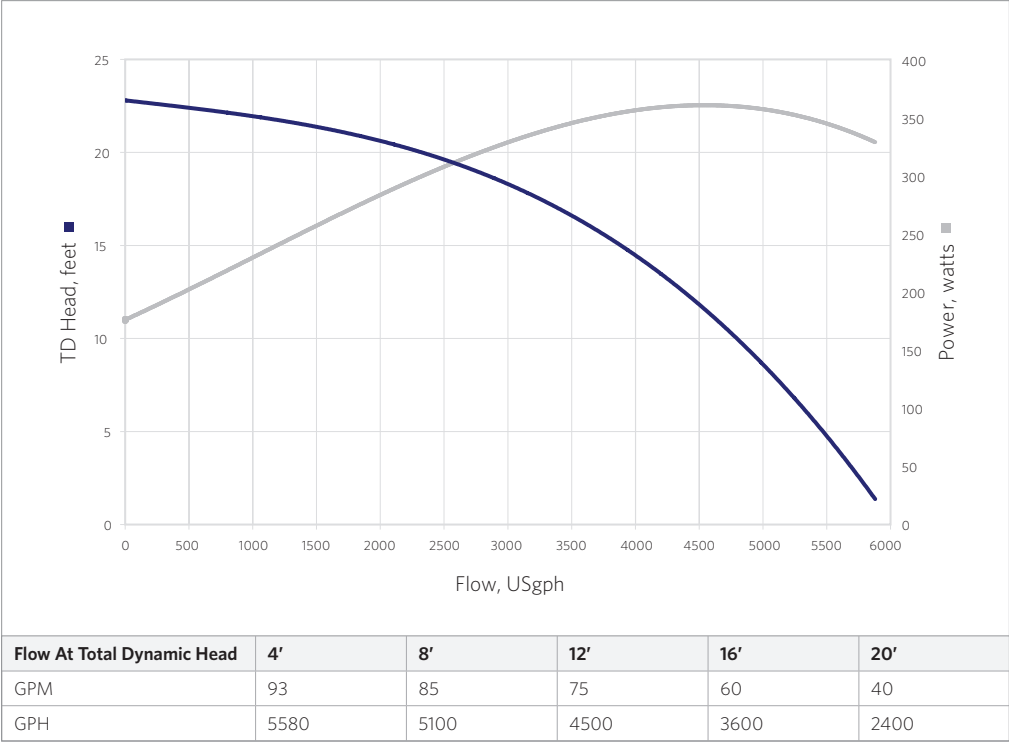



3 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

MODEL	6100SEQ23
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	6100
MAX HEAD (feet)	23'
MAX POWER (watts)	366
MAX CURRENT (amps)	3.03
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	7





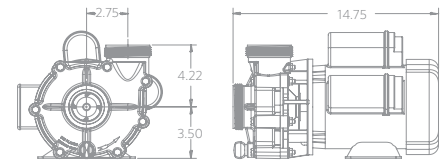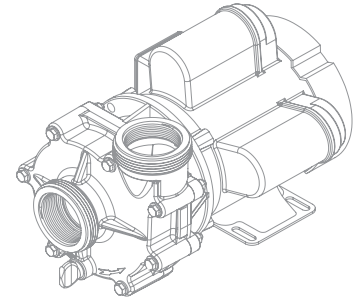

\*Dimensions and illustrations are approximate and for reference only

## Sequence® 4000 Series - Model 3600SEQ20

The expansive design will meet today's increased market demand for performance on all levels. Peak performance of 3600 Gallons Per Hour while only requiring 227 Watts.




3 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

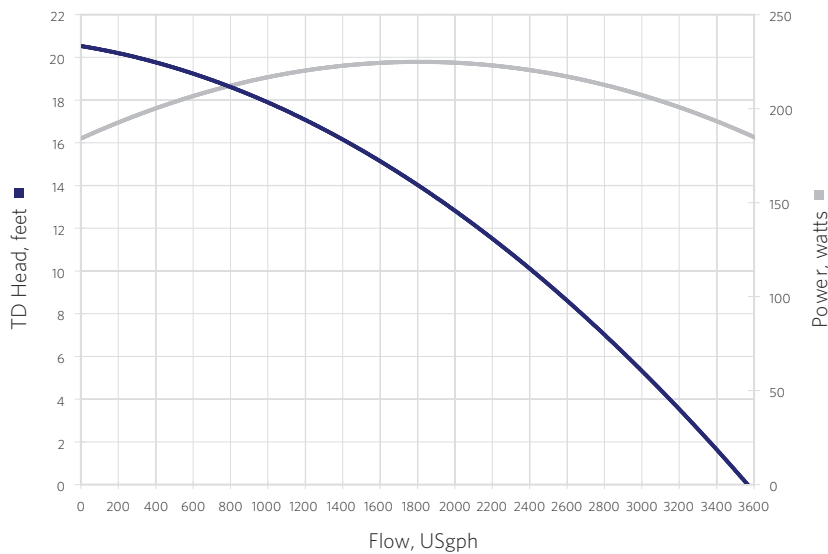

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	52	44	35	24	4
GPH	3120	2640	2100	1440	240

MODEL	3600SEQ20
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	3600
MAX HEAD (feet)	20.5'
MAX POWER (watts)	227
MAX CURRENT (amps)	1.9
@ (volts)	115
MOTOR HP	1/4
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	4




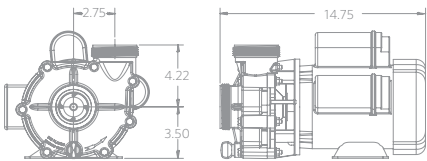

\*Dimensions and illustrations are approximate and for reference only

Sequence® 4000 Series - Model 5000SEQ20

The expansive design will meet today’s increased market demand for performance on all levels. Peak performance of 5000 Gallons Per Hour while only requiring 263 Watts.


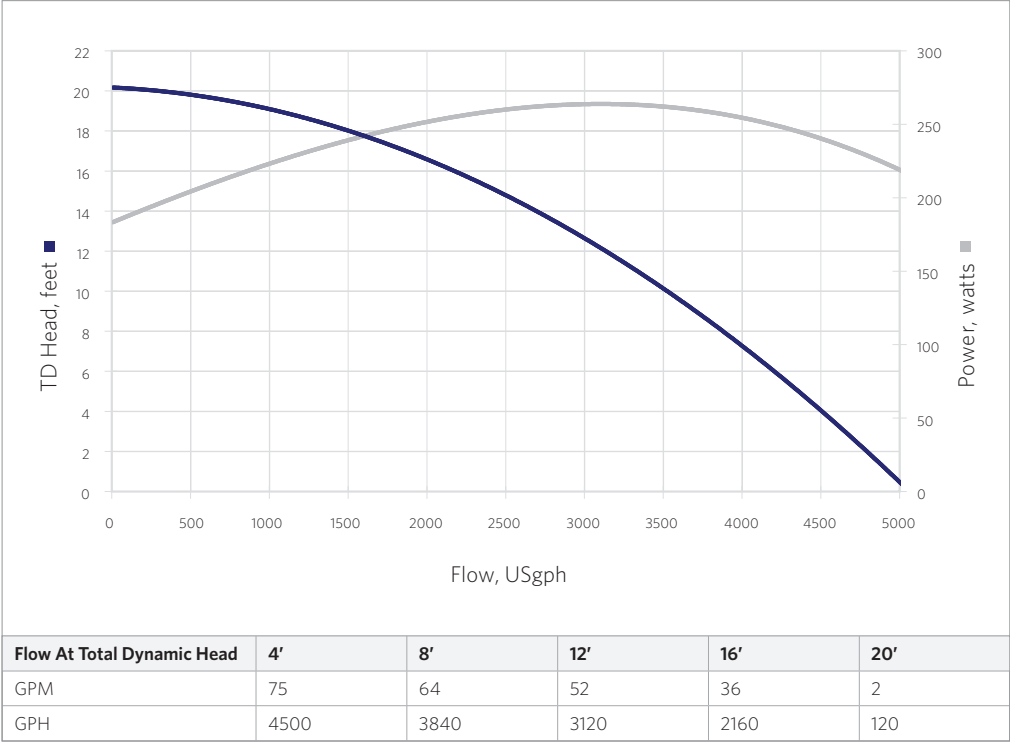


3 YEAR LIMITED WARRANTY

8 FOOT CORD SET

TEFC FAN COOLED MOTOR


MODEL	5000SEQ20
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	5000
MAX HEAD (feet)	20.2'
MAX POWER (watts)	263
MAX CURRENT (amps)	2.3
@ (volts)	115
MOTOR HP	¼
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	5

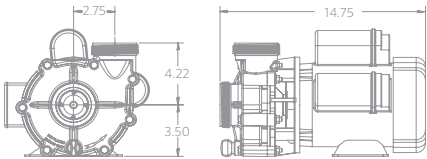

\*Dimensions and illustrations are approximate and for reference only

Sequence® 4000 Series - Model 5800SEQ21

The expansive design will meet today’s increased market demand for performance on all levels. Peak performance of 5800 Gallons Per Hour while only requiring 296 Watts.

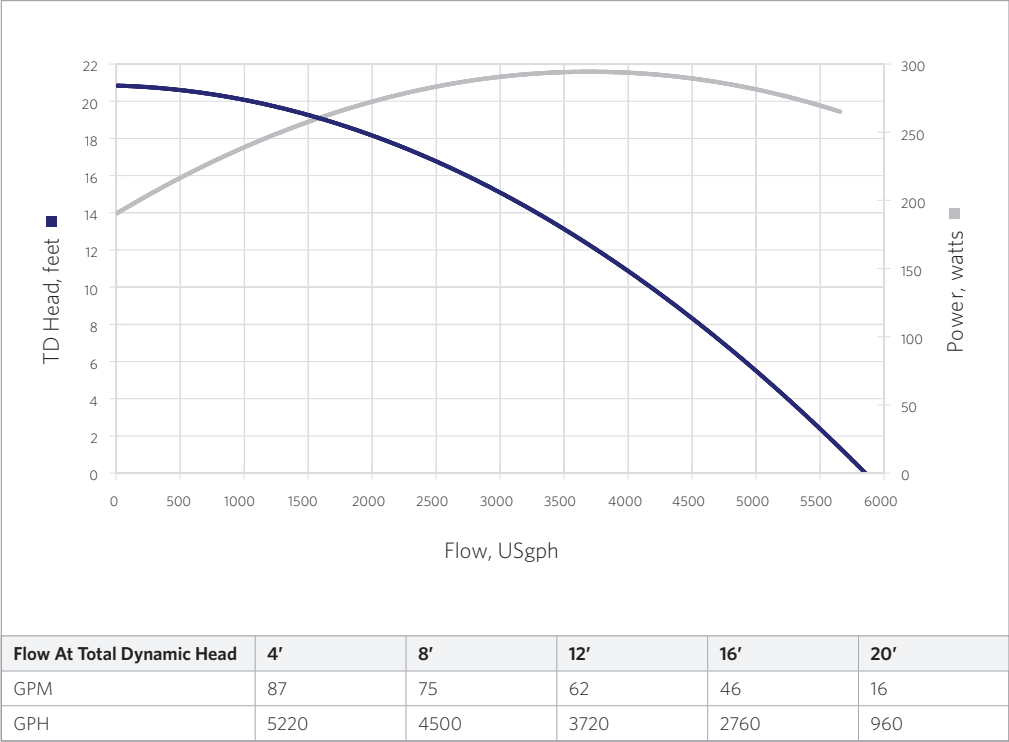

3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	5800SEQ21
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	5800
MAX HEAD (feet)	21'
MAX POWER (watts)	296
MAX CURRENT (amps)	2.6
@ (volts)	115
MOTOR HP	¼
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	6




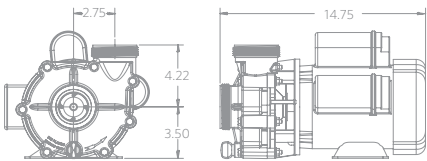

\*Dimensions and illustrations are approximate and for reference only

Sequence® 4000 Series - Model 6800SEQ22

The expansive design will meet today’s increased market demand for performance on all levels. Peak performance of 6840 Gallons Per Hour while only requiring 376 Watts.

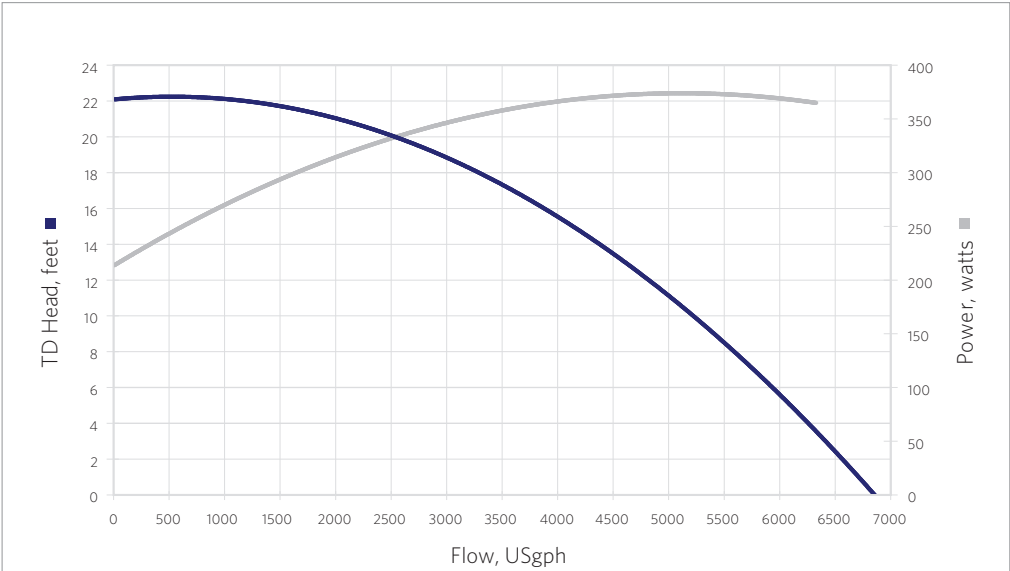

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	104	93	80	64	42
GPH	6240	5580	4800	3840	2520



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR


MODEL	6800SEQ22
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	6840
MAX HEAD (feet)	22.2'
MAX POWER (watts)	376
MAX CURRENT (amps)	3.4
@ (volts)	115
MOTOR HP	½
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	7

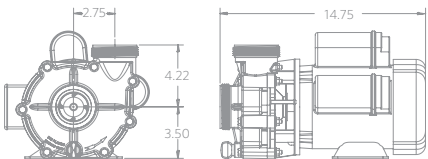

\*Dimensions and illustrations are approximate and for reference only

Sequence® 4000 Series - Model 8200SEQ22

The expansive design will meet today’s increased market demand for performance on all levels. Peak performance of 8220 Gallons Per Hour while only requiring 450 Watts.

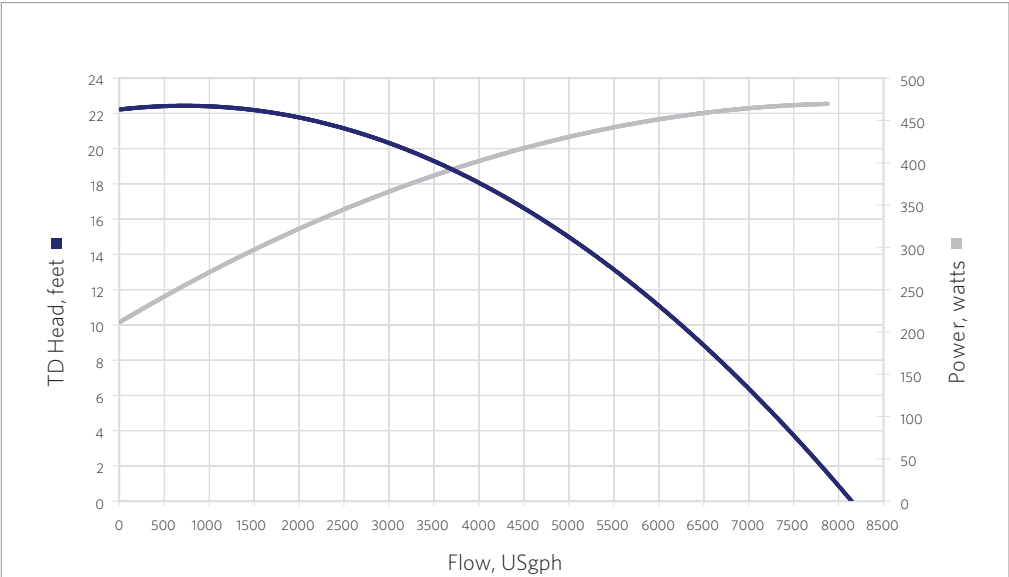

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	125	112	96	78	52
GPH	7500	6720	5760	4680	3120



3 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

MODEL	8200SEQ22
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	8220
MAX HEAD (feet)	22.3'
MAX POWER (watts)	450
MAX CURRENT (amps)	4
@ (volts)	115
MOTOR HP	1/2
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	8






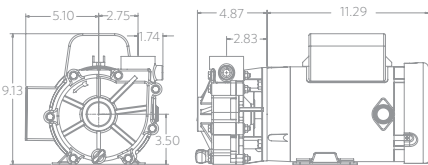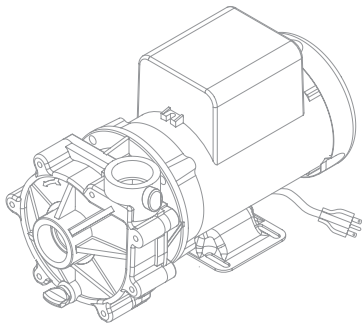

\*Dimensions and illustrations are approximate and for reference only

Sequence® Power 1000 Series - Model 8500PWR55

For the application that demands high performance, we offer the Sequence® Power 1000 Series with abundant flow and pressure. The Power 1000 puts the horsepower and efficiency into the pressure side of the performance requirement but maintains flow rates that will meet the most challenging of scenarios.

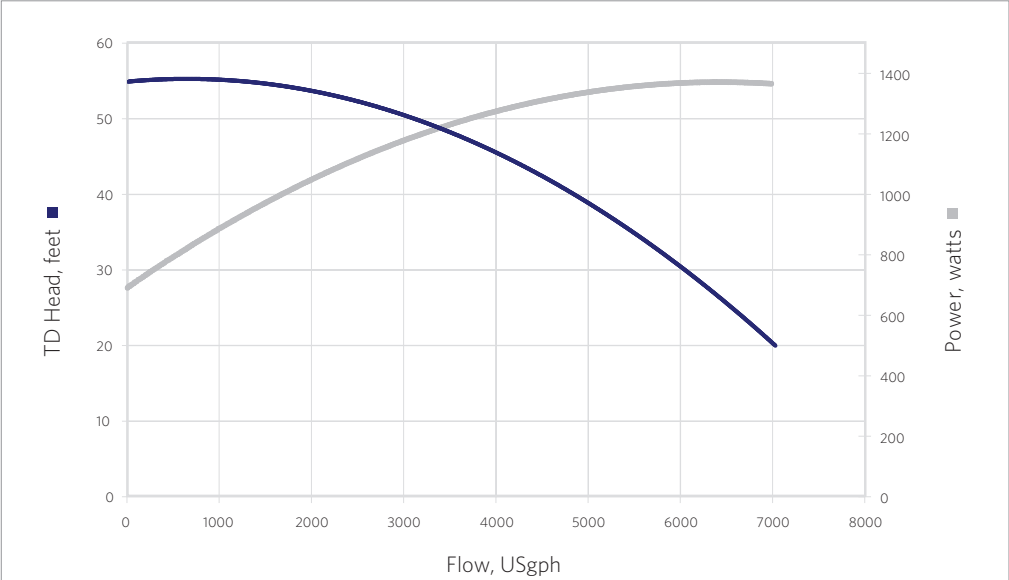

Flow At Total Dynamic Head	10'	20'	30'	40'	50'
GPM	130	118	100	80	53
GPH	7800	7080	6000	4800	3180



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	8500PWR55
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	8500
MAX HEAD (feet)	55'
MAX POWER (watts)	1385
MAX CURRENT (amps)	5.38
@ (volts)	230
MOTOR HP	1.5
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	6T-3.85"




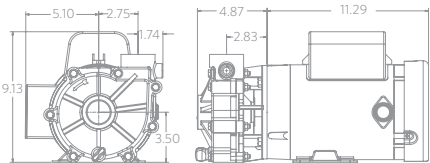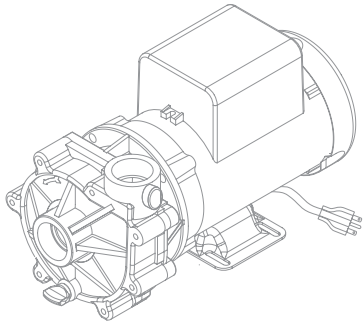

\*Dimensions and illustrations are approximate and for reference only

Sequence® Power 1000 Series - Model 9200PWR69

For the application that demands high performance, we offer the Sequence® Power 1000 Series with abundant flow and pressure. The Power 1000 puts the horsepower and efficiency into the pressure side of the performance requirement but maintains flow rates that will meet the most challenging of scenarios.

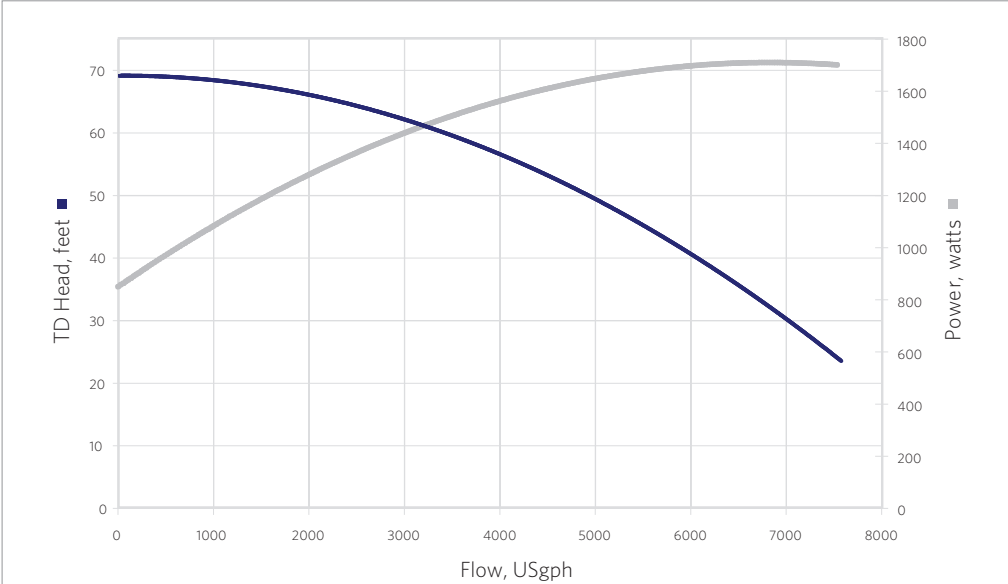

Flow At Total Dynamic Head	10'	20'	30'	40'	50'
GPM	143	130	117	100	81
GPH	8580	7800	7020	6000	4860



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR


MODEL	9200PWR69
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	9200
MAX HEAD (feet)	69'
MAX POWER (watts)	1744
MAX CURRENT (amps)	6.82
@ (volts)	230
MOTOR HP	1.5
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	6T- 4.25"

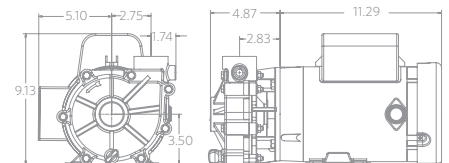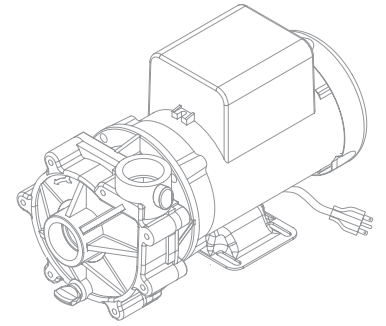

\*Dimensions and illustrations are approximate and for reference only

## Sequence® Power 1000 Series - Model 11000PWR72

For the application that demands high performance, we offer the Sequence® Power 1000 Series with abundant flow and pressure. The Power 1000 puts the horsepower and efficiency into the pressure side of the performance requirement but maintains flow rates that will meet the most challenging of scenarios.

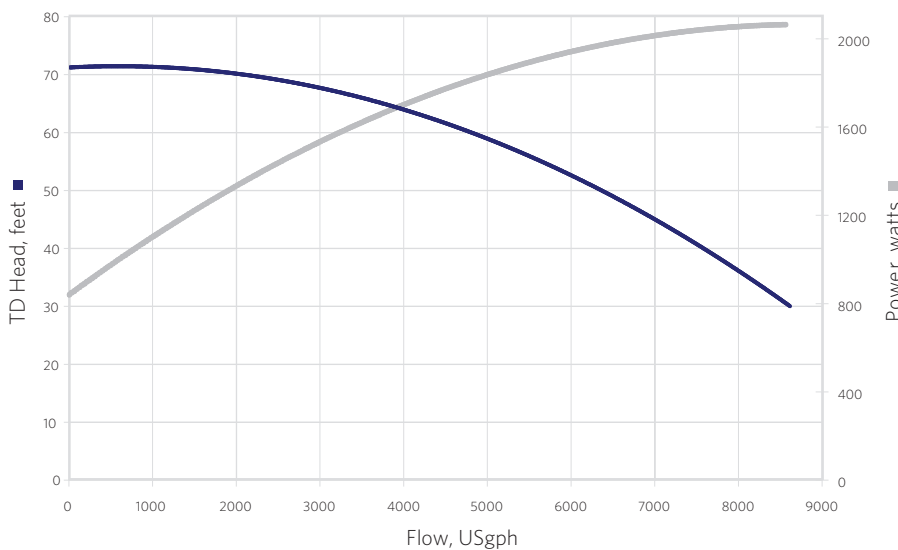

Flow At Total Dynamic Head	10'	20'	30'	40'	50'
GPM	173	159	144	125	105
GPH	10380	9540	8640	7500	6300



**3 YEAR LIMITED WARRANTY**



**8 FOOT CORD SET**





**TEFC FAN COOLED MOTOR**

MODEL	11000PWR72
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	11000
MAX HEAD (feet)	72'
MAX POWER (watts)	2056
MAX CURRENT (amps)	8.58
@ (volts)	230
MOTOR HP	2
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	7T- 4.21"






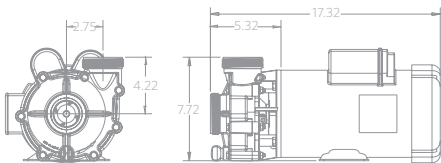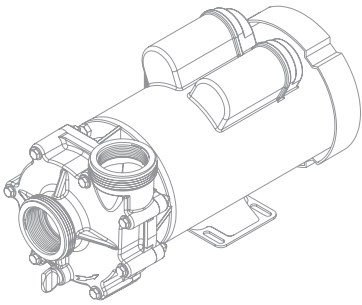

\*Dimensions and illustrations are approximate and for reference only

Sequence® Power 4000 Series - Model 11200PWR81

To support recirculation applications requiring flow rates above 8000 GPH at high head pressures. Achieving over 13,000 GPH and a max of 80 feet of head, the 4000 broadens the performance range in the Sequence Power series.

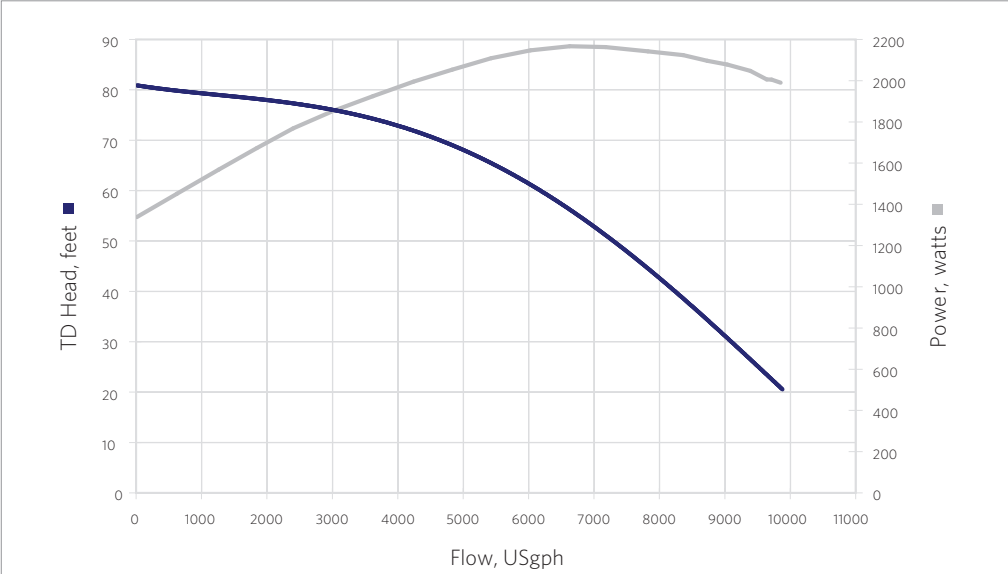

Flow At Total Dynamic Head	40'	50'	60'	70'	75'
GPM	138	122	102	75	53
GPH	8280	7320	6120	4500	3180



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	11200PWR81
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	11160
MAX HEAD (feet)	80.8'
MAX POWER (watts)	2162
MAX CURRENT (amps)	9.6
@ (volts)	230
MOTOR HP	3
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	6




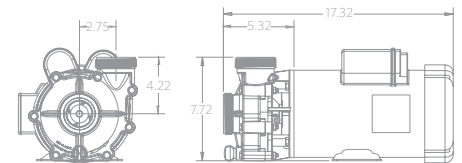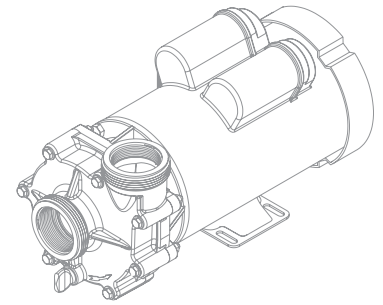

*\*Dimensions and illustrations are approximate and for reference only*

## Sequence® Power 4000 Series - Model 13200PWR81

To support recirculation applications requiring flow rates above 8000 GPH at high head pressures. Achieving over 13,000 GPH and a max of 80 feet of head, the 4000 broadens the performance range in the Sequence Power series.

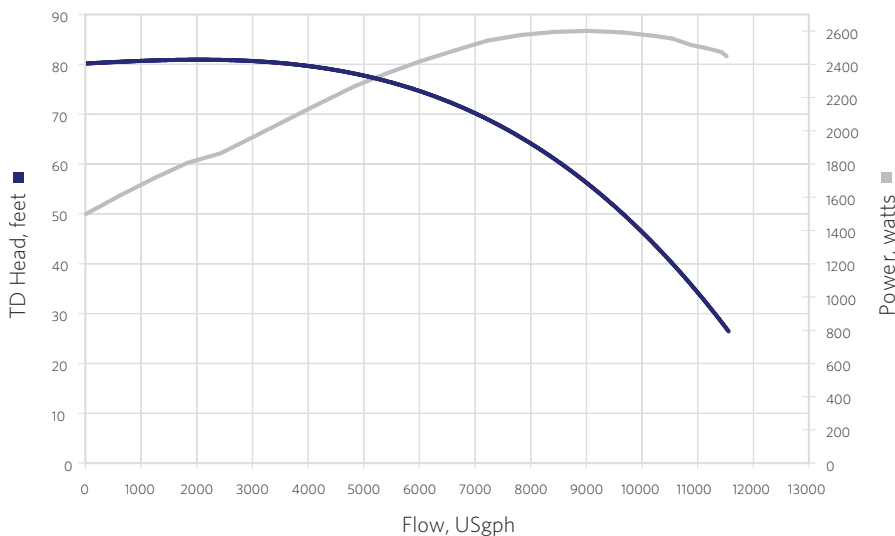

Flow At Total Dynamic Head	40'	50'	60'	70'	75'
GPM	175	160	141	117	60
GPH	10500	9600	8600	5500	3600



**3 YEAR LIMITED WARRANTY**



**8 FOOT CORD SET**





**TEFC FAN COOLED MOTOR**

MODEL	13200PWR81
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	13200
MAX HEAD (feet)	81.7'
MAX POWER (watts)	2595
MAX CURRENT (amps)	11.5
@ (volts)	230
MOTOR HP	3
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	7






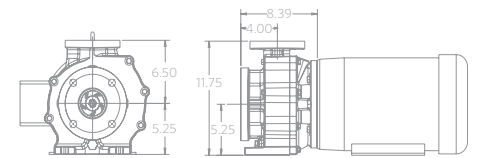

*\*Dimensions and illustrations are approximate and for reference only*

## Sequence® Titan Series - Model 12000SEQ21

As large water features and high turnover requirements continue to gain popularity, the cost of energy does not! Imagine 12,000 GPH for less than 845 watts! The Sequence® Titan series is sure to cover most large scale water feature requirements.

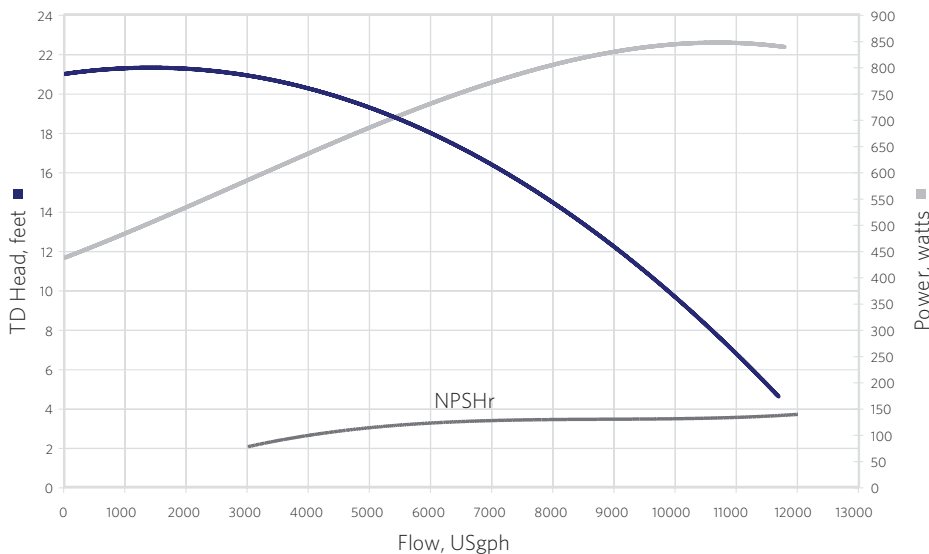

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	197	176	164	120	70
GPH	11820	10560	9840	7200	4200



**3 YEAR LIMITED WARRANTY**





**MANUFACTURED IN THE USA**



**TEFC FANCOOLED MOTOR**

MODEL	12000SEQ21
INLET	3"
DISCHARGE	2"
MAX FLOW (gph)	12500
MAX HEAD (feet)	21'
MAX POWER (watts)	845
MAX CURRENT (amps)	6
@ (volts)	230
MOTOR HP	¾
MOTOR TYPE	143JM
MOTOR ENCLOSURE	TEFC
PHASE	SINGLE



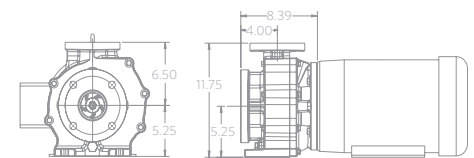

*\*Dimensions and illustrations are approximate and for reference only*

## Sequence® Titan Series - Model 18000SEQ45

As large water features and high turnover requirements continue to gain popularity, the cost of energy does not! The Sequence® Titan series is sure to cover most large scale water feature requirements.




**3 YEAR LIMITED  
WARRANTY**



**MANUFACTURED  
IN THE USA**





**TEFC FANCOOLED  
MOTOR**

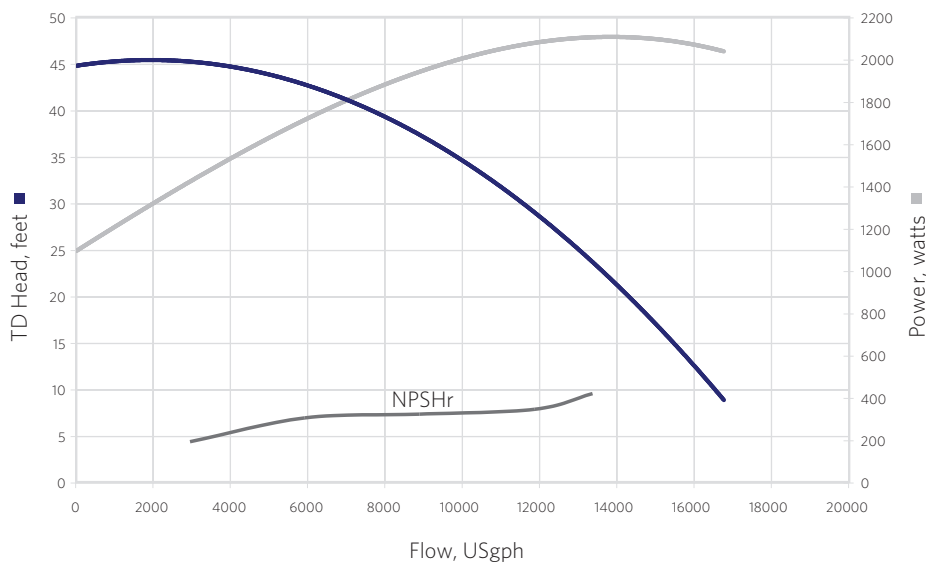

Flow At Total Dynamic Head	10'	20'	30'	40'	45'
GPM	275	238	192	125	60
GPH	16500	14280	11520	7500	3600

MODEL	18000SEQ45
INLET	3"
DISCHARGE	2"
MAX FLOW (gph)	18400
MAX HEAD (feet)	45'
MAX POWER (watts)	2110
MAX CURRENT (amps)	10.8
@ (volts)	230
MOTOR HP	3
MOTOR TYPE	184JM
MOTOR ENCLOSURE	TEFC
PHASE	SINGLE

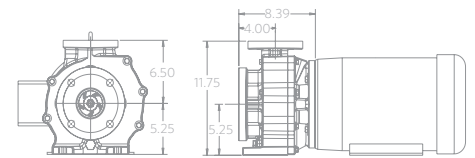

*\*Dimensions and illustrations are approximate and for reference only*

## Sequence® Titan Series - Model 31500SEQ180

As large water features and high turnover requirements continue to gain popularity, the cost of energy does not! Titan series is sure to cover most large scale water feature requirements.




**3 YEAR LIMITED WARRANTY**



**MANUFACTURED IN THE USA**



**TEFC FANCOOLED MOTOR**

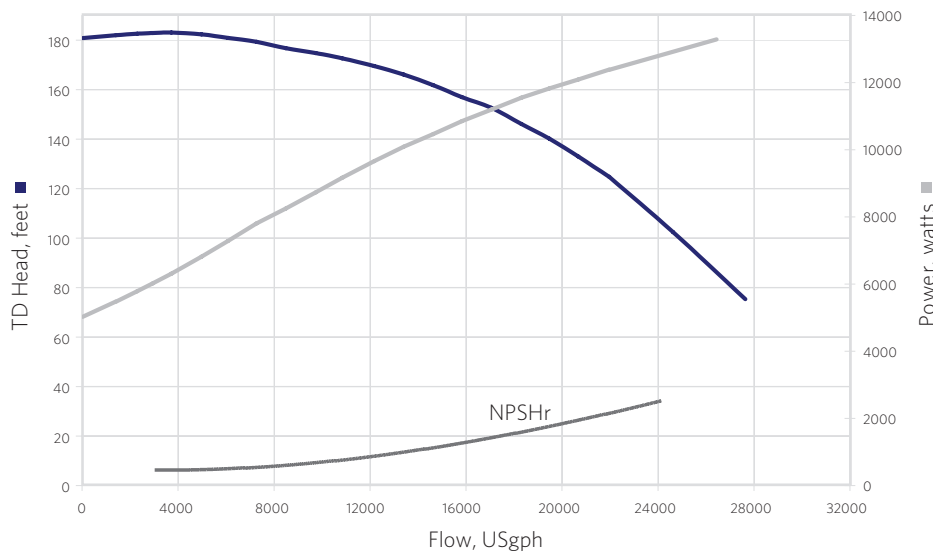



Flow At Total Dynamic Head	60'	90'	120'	150'	180'
GPM	500	450	392	312	117
GPH	30000	27000	23500	18700	7000

MODEL	31500SEQ180
INLET	3"
DISCHARGE	2"
MAX FLOW (gph)	32000
MAX HEAD (feet)	180'
MAX POWER (watts)	13000
MAX CURRENT (amps)	36
@ (volts)	230
MOTOR HP	15
MOTOR TYPE	215JM
MOTOR ENCLOSURE	TEFC
PHASE	THREE








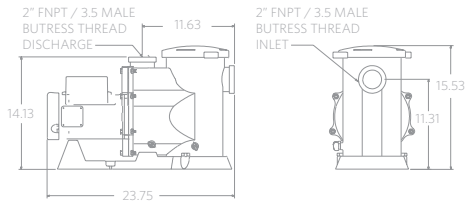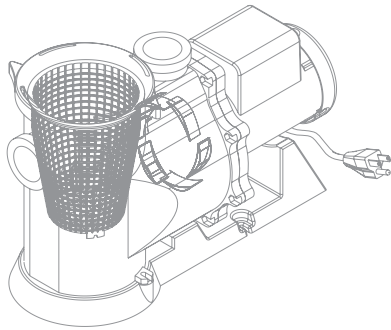

\*Dimensions and illustrations are approximate and for reference only

Sequence® Primer Alpha Series - Model 6800PRM19

The Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.

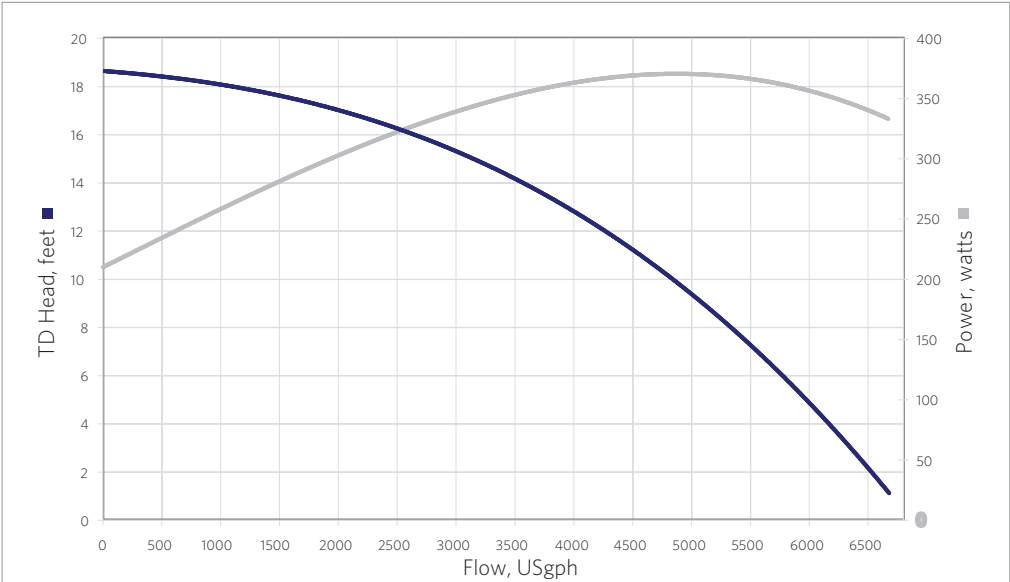

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	103	89	70	45	0
GPH	6180	5340	4200	2700	0



3 YEAR LIMITED WARRANTY




8 FOOT CORD SET




TEFC FAN COOLED MOTOR

MODEL	6800PRM19
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	6800
MAX HEAD (feet)	19'
MAX POWER (watts)	369
MAX CURRENT (amps)	3.93
@ (volts)	115
MOTOR HP	½, ⅓
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	TEFC

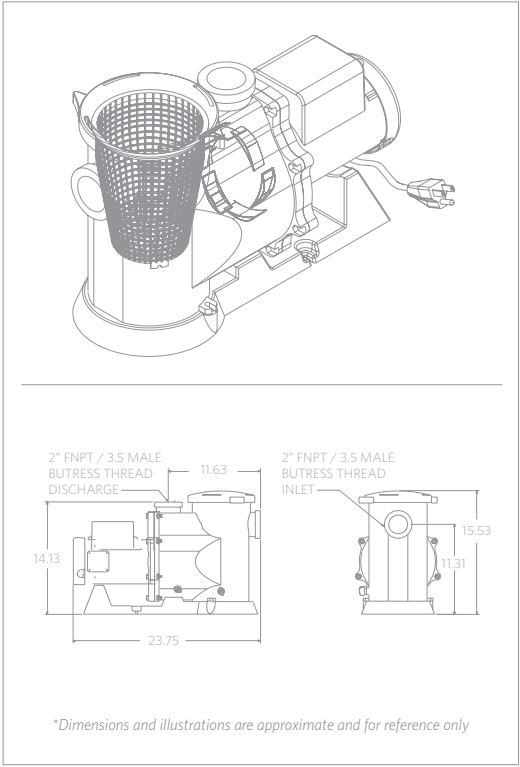

Sequence® Primer Alpha Series - Model 7800PRM24

The Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.

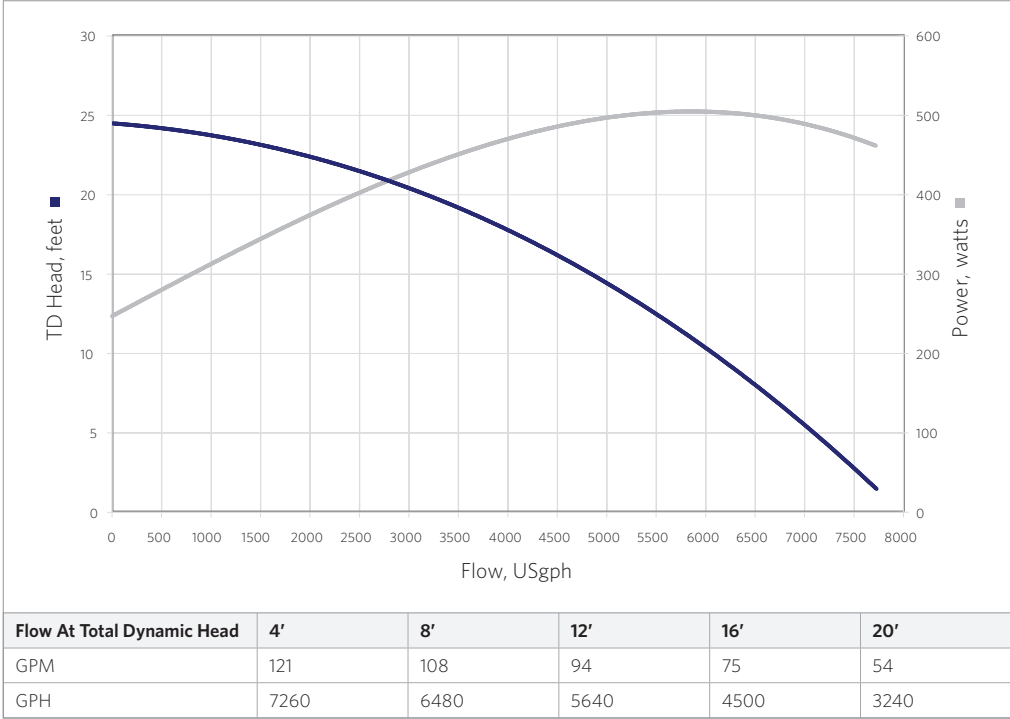

3 YEAR LIMITED WARRANTY

8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	7800PRM24
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	7800
MAX HEAD (feet)	24'
MAX POWER (watts)	504
MAX CURRENT (amps)	5.02
@ (volts)	115
MOTOR HP	½, ⅓
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	TEFC








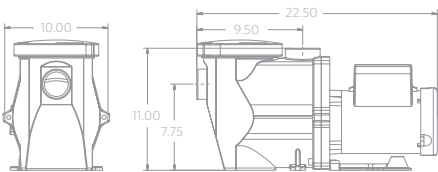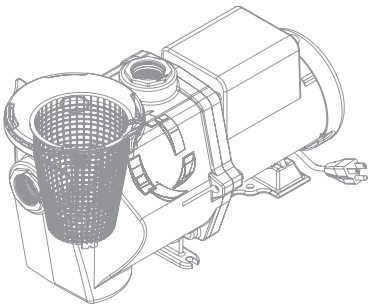

\*Dimensions and illustrations are approximate and for reference only

Sequence® Primer Champion Series - Model 3700PRM21

The Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.

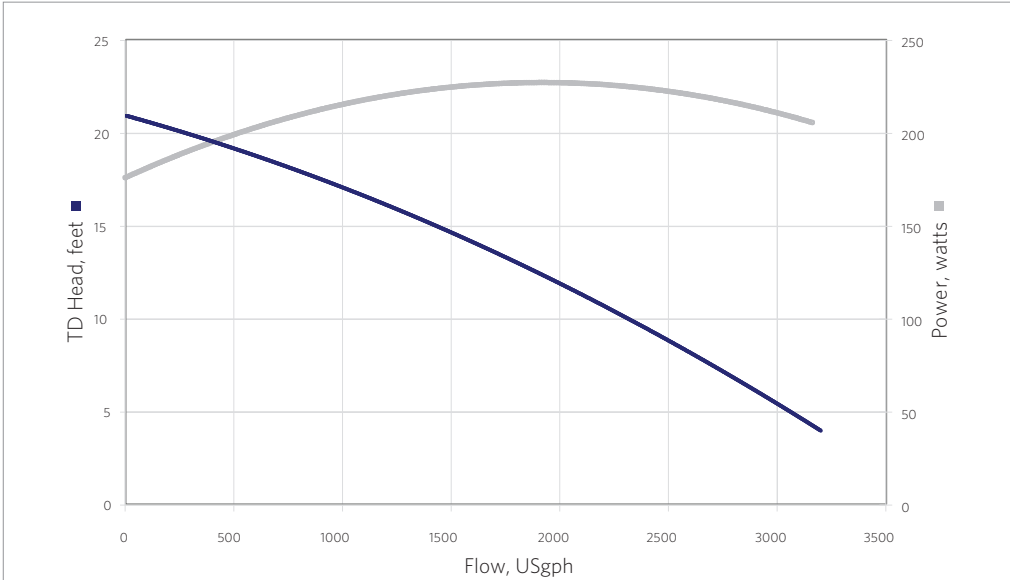

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	49	42	34	23	4
GPH	2940	2520	2040	1380	240



3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR


MODEL	3700PRM21
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	3700
MAX HEAD (feet)	21'
MAX POWER (watts)	228
MAX CURRENT (amps)	2.76
@ (volts)	115
MOTOR HP	1/2, 1/3
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	TEFC

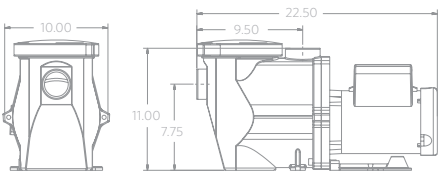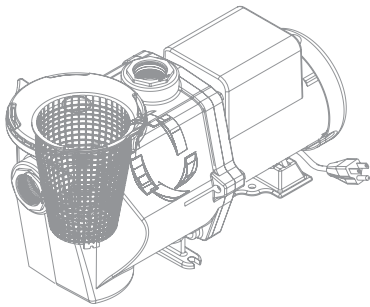

\*Dimensions and illustrations are approximate and for reference only

Sequence® Primer Champion Series - Model 4900PRM21

The Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.

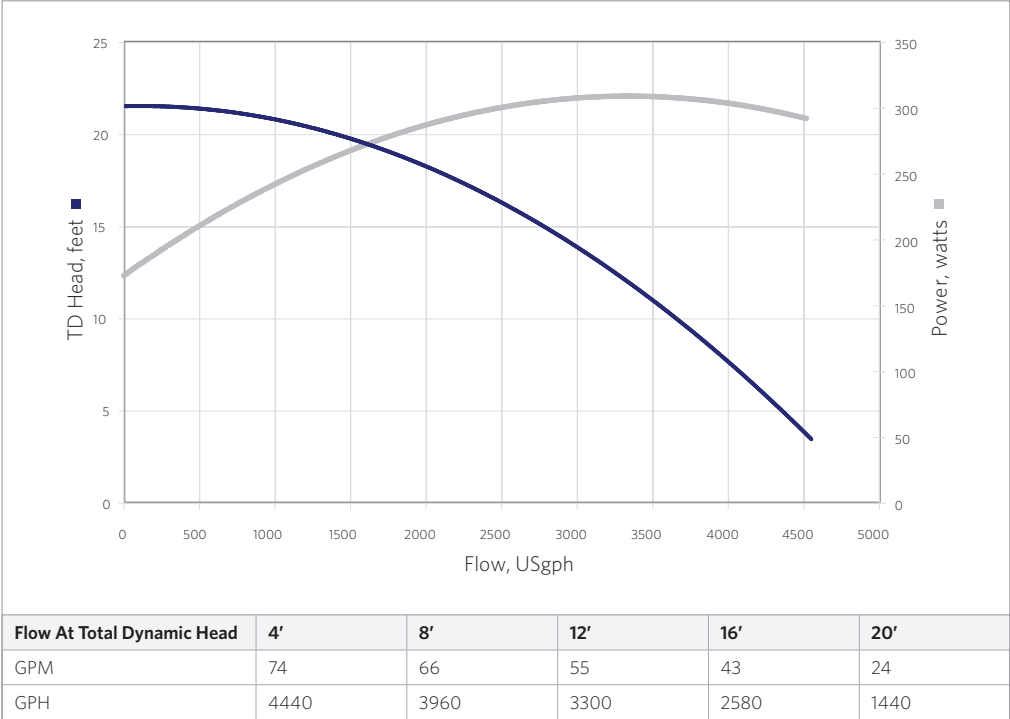

3 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	4900PRM21
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	4900
MAX HEAD (feet)	21'
MAX POWER (watts)	310
MAX CURRENT (amps)	3.37
@ (volts)	115
MOTOR HP	½, ⅓
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	TEFC




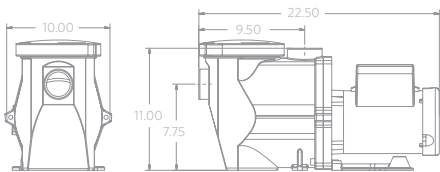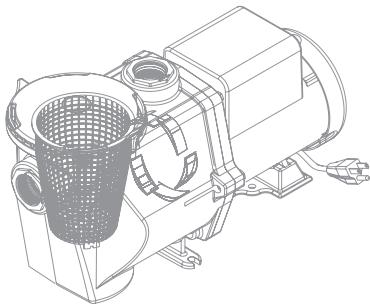

\*Dimensions and illustrations are approximate and for reference only

Sequence® Primer Champion Series - Model 6600PRM24

The Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.

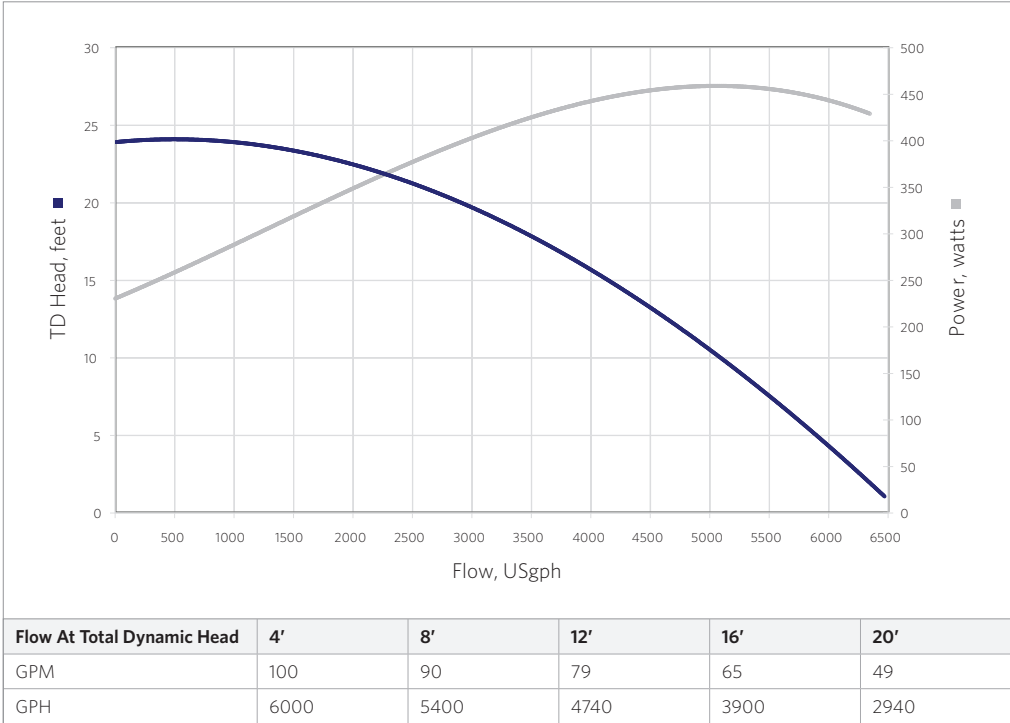

3 YEAR LIMITED WARRANTY



8 FOOT CORD SET




TEFC FAN COOLED MOTOR

MODEL	6600PRM24
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	6600
MAX HEAD (feet)	24'
MAX POWER (watts)	457
MAX CURRENT (amps)	4.61
@ (volts)	115
MOTOR HP	½, ⅓
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	TEFC






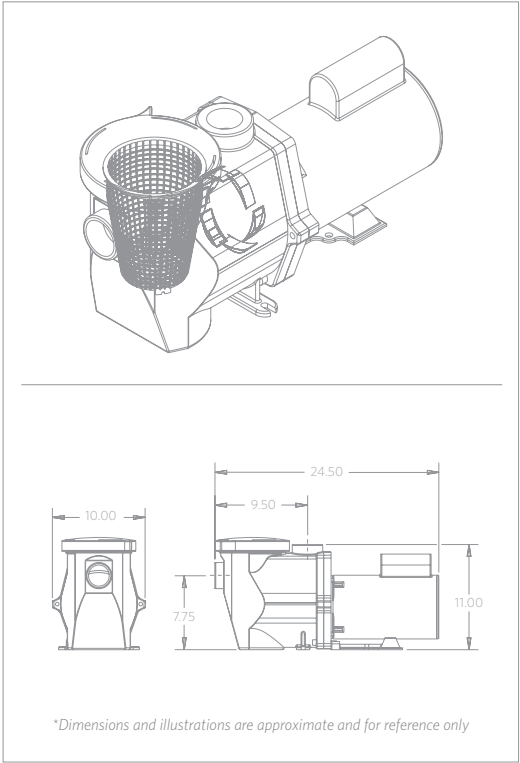

**Sequence® Primer Power Series - Model 6300PRM77**

The Sequence® Power series is made for those demanding applications where the constraint for high pressure is not subject to negotiation. The Power Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation.

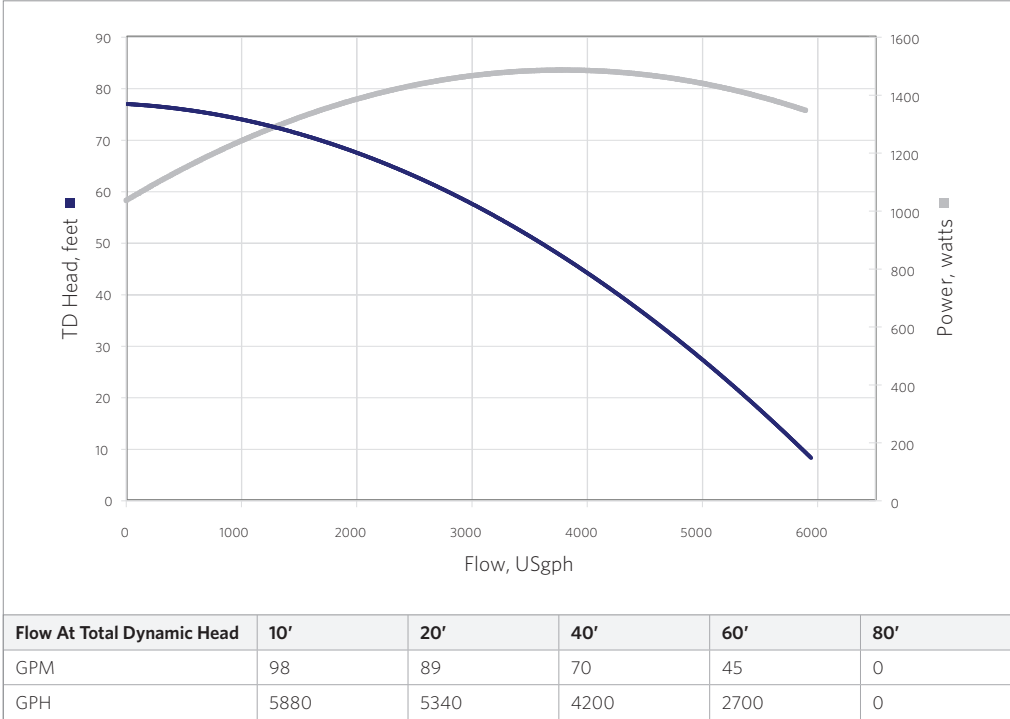



**3 YEAR LIMITED WARRANTY**

**8 FOOT CORD SET**

**TEFC FAN COOLED MOTOR**

MODEL	6300PRM77
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	6300
MAX HEAD (feet)	77'
MAX POWER (watts)	1496
MAX CURRENT (amps)	8.7
@ (volts)	230
MOTOR HP	2
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	ODP




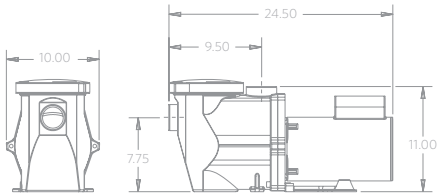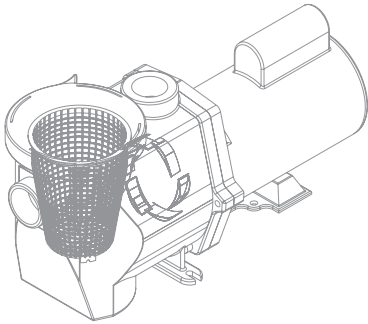

\*Dimensions and illustrations are approximate and for reference only

Sequence® Primer Power Series - Model 8100PRM81

The Sequence® Power series is made for those demanding applications where the constraint for high pressure is not subject to negotiation. The Power Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation.

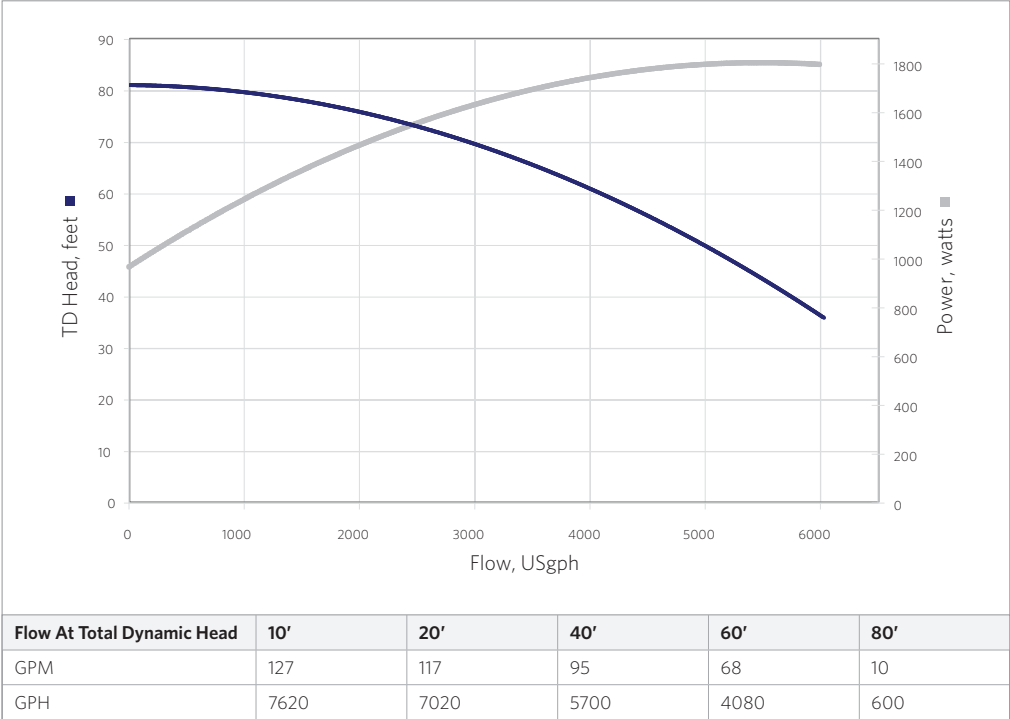

3 YEAR LIMITED WARRANTY




8 FOOT CORD SET




TEFC FAN COOLED MOTOR

MODEL	8100PRM81
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	8100
MAX HEAD (feet)	81'
MAX POWER (watts)	1807
MAX CURRENT (amps)	9.8
@ (volts)	230
MOTOR HP	2
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	ODP

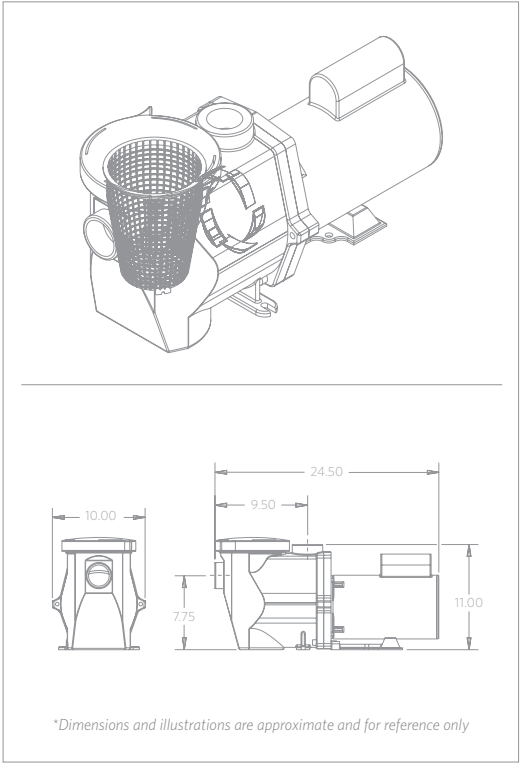

Sequence® Primer Power Series - Model 9300PRM83

The Sequence® Power series is made for those demanding applications where the constraint for high pressure is not subject to negotiation. The Power Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation.

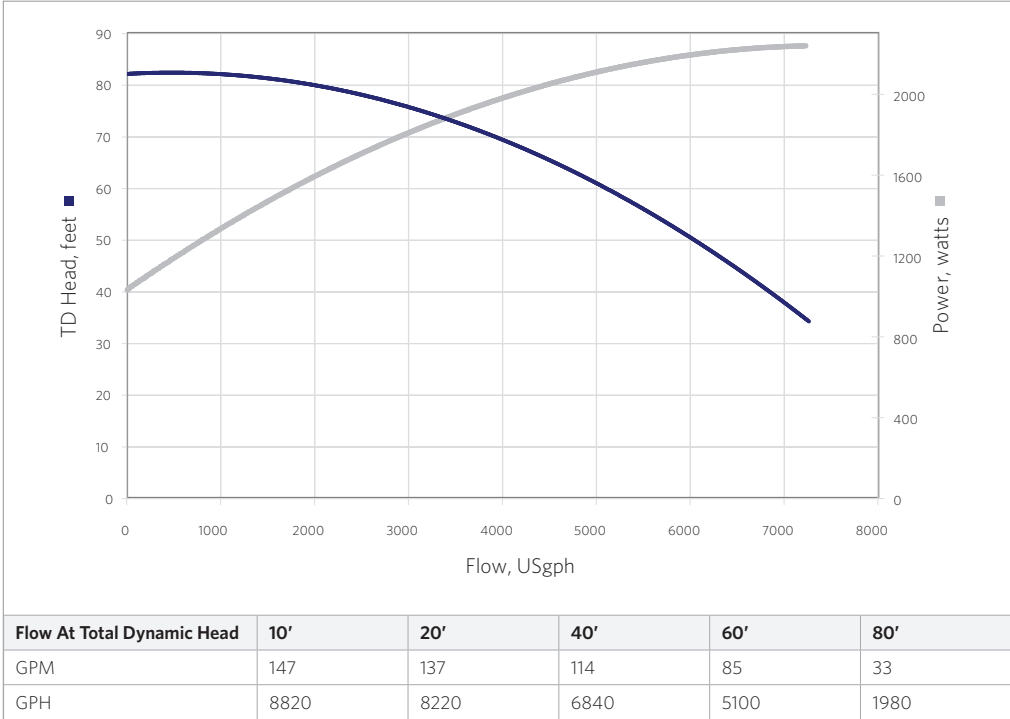

3 YEAR LIMITED WARRANTY

8 FOOT CORD SET

TEFC FAN COOLED MOTOR

MODEL	9300PRM83
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	9300
MAX HEAD (feet)	83'
MAX POWER (watts)	2222
MAX CURRENT (amps)	11.4
@ (volts)	230
MOTOR HP	2
MOTOR TYPE	56YZ
MOTOR ENCLOSURE	ODP







### Sequence® Strainer Basket - 90 Cubic Inch

We offer a few different options of strainer baskets for those applications that demand debris interception as well as a simple priming configuration. Our 90 Cubic Inch Strainer Baskets are sold with either a 1.5" or 2" union adapter. All units come complete with an internal strainer assembly and gasket seals.

SIZE	PART NUMBER	O-RINGS	MATERIAL
1.5"	1000.771-1	Buna	PVC/ABS/Lexon
2"	1000.771-7	Buna	PVC/ABS/Lexon



### Sequence® Strainer Basket - 500 Cubic Inch

Our 500 Cubic Inch Strainer Baskets are sold with 2" and 3" union adapters. All units come complete with an internal strainer assembly and gasket seals.

SIZE	PART NUMBER	O-RINGS	MATERIAL
1.5" / 2"	24157724	Buna	PVC/ABS/PC
3"	24166728	Buna	PVC/ABS/PC



### Sequence® Swing Check Valves

We offer three different sizes of swing check valves (1.5", 2" or 3") for applications that require above water level pump placement. All units are made from 100% PVC with a rubber sealed flapper swing valve.

SIZE	PART NUMBER	MATERIAL
1.5"	MP-CV15	PVC
2"	MP-CV20	PVC
3"	MP-CV30	PVC